


We offer Half-Mirror optics designed for use in Ultraviolet, Visible and Infrared wavelengths. They can be used for both transmission and divergence of multi-wavelength lasers and white light sources.

Ultra broadband half-mirrors are used for spectrometry applications.


- PMH series have 4 types of ultra-broadband optics suitable for UV to IR applications.
- PSMH series have 3 types of ultra-broadband optics for ranges from Visible to NIR, which are used for optical communication applications.
- Dielectric multi-layer coated optics are an excellent choice for beam deviation applications because of its low absorption capabilities.
- Its low polarization characteristic can also be applied in beam deviation with a linear polarization laser or a laser light.
- Sigma Koki produces plate from optics that are light weight and maintains low dispersion with less aberration.
- Both wedge and plate type mirrors are made to have "low ghosting and low interference effects".



Schematic

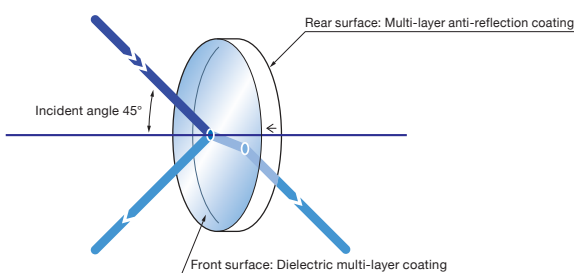

Outline Drawing

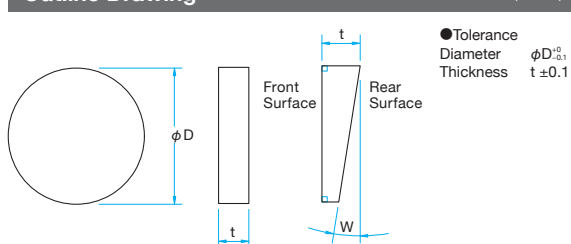

Specifications

Material	BK7, Synthetic fused silica
Surface Flatness	$\lambda/10$
Coating	Front surface: Dielectric multi-layer coating Rear surface: Multi-layer anti-reflection coating
Incident angle	45°
Divergence ratio (reflectance : transmittance)	1 : 1
Surface Quality (Scratch-Dig)	10-5
Clear aperture	90% of actual aperture

Guide

- ▶ For customization, we can offer different sizes, wavelengths and deviation ratios. [Reference](#) B068
Please contact our Sales Division with your requests.
- ▶ For guaranteed higher reflectance accuracy and higher transmittance optics, please contact us.
- ▶ An arrow mark will be printed on the thick side of the wedge plate to indicate the surface of the mirror.

Attention

- ▶ When applying laser linear polarized light, the direction of polarization may affect the amount of reflectance and transmittance. For a divergence usage of 1:1 ratio, ensure the direction of polarization is set to 45 degrees or use a circular polarizer.
- ▶ When a laser light transmits through the optics, the light path may shift by a few millimeters horizontally due to refraction and the thickness of the wedge plate.
- ▶ The transmittance wavelength properties may be different if the incident angle is other than 45 degrees.
- ▶ Please check the arrow mark on the side of the wedge plate that indicates the coated surface.
- ▶ The phase difference of incident light cannot be preserved on light transmittance and reflectance; Please use a wave plate to compensate.

Ultra broadband

Part Number	Wavelength Range [nm]	Diameter ϕD [mm]	Thickness t [mm]	Material	Parallelism W	Transmittance (The average value of the P-Polarization and the S-Polarization) [%]	Laser Damage Threshold* [J/cm ²]
PMH-25.4C03-10-25/7	250 - 700	$\phi 25.4$	3	Synthetic fused silica	<5"	Average 50 $\pm$ 10	0.5
PMH-30C03-10-25/7	250 - 700	$\phi 30$	3	Synthetic fused silica	<5"	Average 50 $\pm$ 10	0.5
PMH-50C05-10-25/7	250 - 700	$\phi 50$	5	Synthetic fused silica	<5"	Average 50 $\pm$ 10	0.5
PMH-25.4C03-10-3/10	300 - 1000	$\phi 25.4$	3	Synthetic fused silica	<5"	Average 50 $\pm$ 10	0.5
PMH-30C03-10-3/10	300 - 1000	$\phi 30$	3	Synthetic fused silica	<5"	Average 50 $\pm$ 10	0.5
PMH-50C05-10-3/10	300 - 1000	$\phi 50$	5	Synthetic fused silica	<5"	Average 50 $\pm$ 10	0.5
PMH-25.4C03-10-6/18	600 - 1800	$\phi 25.4$	3	BK7	<5"	Average 50 $\pm$ 10	0.5
PMH-30C03-10-6/18	600 - 1800	$\phi 30$	3	BK7	<5"	Average 50 $\pm$ 10	0.5
PMH-50C05-10-6/18	600 - 1800	$\phi 50$	5	BK7	<5"	Average 50 $\pm$ 10	0.5
PMH-25.4C03-10-4/20	400 - 2000	$\phi 25.4$	3	BK7	<5"	Average 50 $\pm$ 10	0.5
PMH-30C03-10-4/20	400 - 2000	$\phi 30$	3	BK7	<5"	Average 50 $\pm$ 10	0.5
PMH-50C05-10-4/20	400 - 2000	$\phi 50$	5	BK7	<5"	Average 50 $\pm$ 10	0.5

* Laser pulse width 10ns, repetition frequency 20Hz


Compatible Optic Mounts

BHAN-30S, -50S / MHG-HS25-NL, MP30-NL, MP50-NL


Typical Transmittance Data

T: Transmission


PMH-25/7

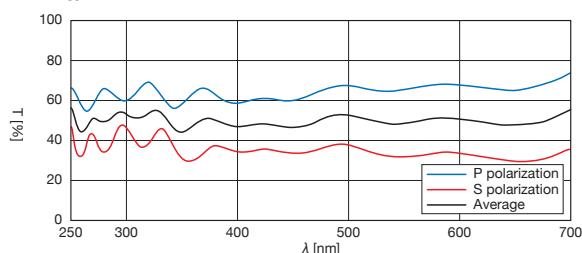


PMH-3/10

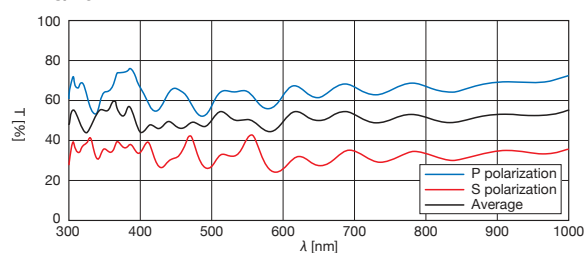

PMH-6/18

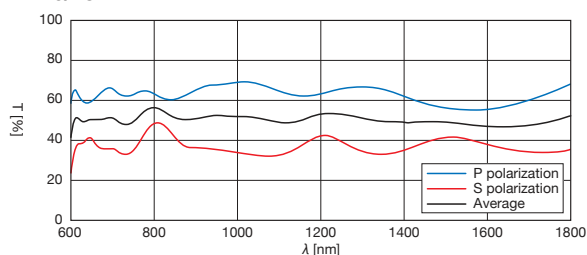

PMH-4/20

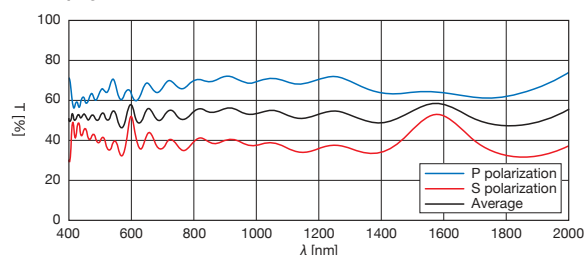

Broadband


Part Number	Wavelength Range [nm]	Diameter ϕ D [mm]	Thickness t [mm]	Material	Parallelism W	Transmittance (The average value of the P-Polarization and the S-Polarization) [%]	Laser Damage Threshold* [J/cm ²]
PSMH-25.4C03-10-550	400 – 700	ϕ 25.4	3	BK7	<5"	Average 50±5	2.1
PSMH-30C03-10-550	400 – 700	ϕ 30	3	BK7	<5"	Average 50±5	2.1
PSMH-30C05-10W-550	400 – 700	ϕ 30	5	BK7	1°±5'	Average 50±5	2.1
PSMH-40C04-10-550	400 – 700	ϕ 40	4	BK7	<5"	Average 50±5	2.1
PSMH-50C05-10-550	400 – 700	ϕ 50	5	BK7	<5"	Average 50±5	2.1
PSMH-50C08-10W-550	400 – 700	ϕ 50	8	BK7	1°±5'	Average 50±5	2.1
PSMH-30C03-10-800	700 – 900	ϕ 30	3	BK7	<5"	50±3 (800nm)	2.1
PSMH-30C05-10W-800	700 – 900	ϕ 30	5	BK7	1°±5'	50±3 (800nm)	2.1
PSMH-50C05-10-800	700 – 900	ϕ 50	5	BK7	<5"	50±3 (800nm)	2.1
PSMH-50C08-10W-800	700 – 900	ϕ 50	8	BK7	1°±5'	50±3 (800nm)	2.1
PSMH-30C03-10-1400	1300 – 1550	ϕ 30	3	BK7	<5"	50±3 (1400nm)	2.1
PSMH-30C05-10W-1400	1300 – 1550	ϕ 30	5	BK7	1°±5'	50±3 (1400nm)	2.1

* Laser pulse width 10ns, repetition frequency 20Hz


Typical Transmittance Data

T: Transmission


PSMH-550

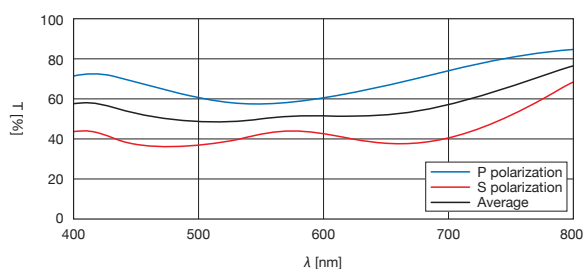

PSMH-800

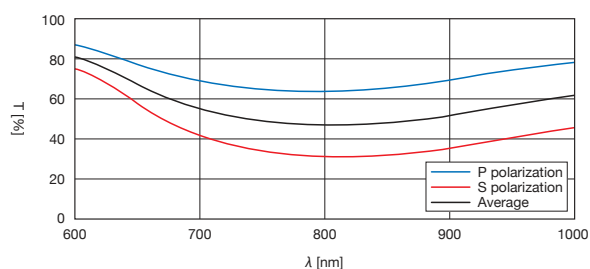

PSMH-1400

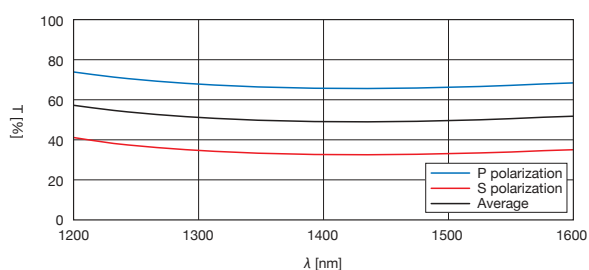

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Half Mirror Cube

Half Mirror Plate

Application Note

Beamsplitters

Harmonic Separator

Beam Samplers

Others