




OBR 4610

Optical Backscatter Reflectometer™



The Luna OBR 4610 extends Luna's award winning Optical Backscatter Reflectometer™ technology to 1060 nm applications.

Designed for component and short optical network testing and troubleshooting, the OBR 4610 delivers ultra-high resolution reflectometry with backscatter-level sensitivity. With sampling resolution as low as 10 microns, zero dead zone, an extremely low noise floor, the OBR 4610 allows you to “see inside” your components and systems and map reflection loss along the entire length of the optical path. Backscatter-level sensitivity allows distributed IL measurements as well. The OBR 4610 provides spectral analysis of the optical path and phase measurements.

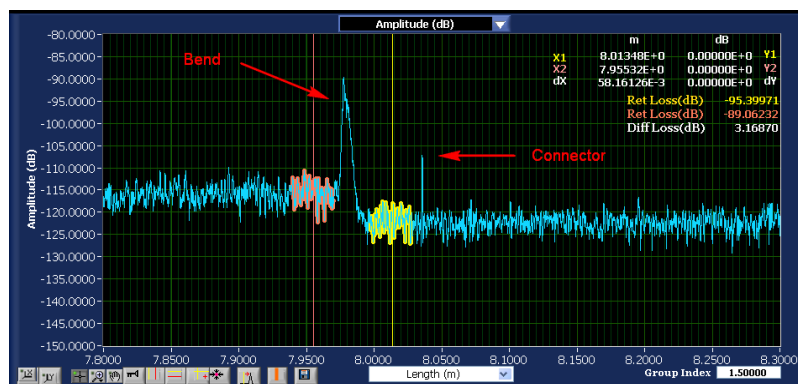

Use convenient cursor tools to measure and examine scatter level and reflection events to measure RL and IL for closely spaced events.

“Zero Dead Zone” reflectometer designed to “see inside” components and systems

KEY FEATURES

- “Zero Dead Zone” reflectometer for optical components and systems
- Operates at 1040 - 1080 nm
- Sampling resolution of 10 μm at 30 m length
- 80 dB dynamic range
- Backscatter-level sensitivity (-130 dB)
- High-speed scanning
- Measure IL, RL, distributed loss, distance, polarization states, phase derivative and group delay

APPLICATIONS

- Analyze distributed loss in components and short optical networks
- Easily locate, identify and troubleshoot macro-bends, splices, connectors and breaks
- Test and troubleshoot short-run networks and systems
- Unprecedented visibility into miniaturized components



INTERLAB Sp. z o.o. | Instrumenty badawcze i pomiarowe

Kosiarzy 37 paw. 20, 02-953 Warszawa | +48 22 840 81 80 | interlab@interlab.pl | interlab.pl

SPECIFICATIONS (PRELIMINARY)

Parameter		Specification
Measurement		
Wavelength ranges		1040 - 1080 nm
Maximum measurement length		30 m or 70 m
Sampling resolution	30 m mode	10 μ m
	70 m mode	20 μ m
Effective dead zone		Equals 2-pt sampling resolution
Wavelength resolution (max)		0.01 pm
Wavelength accuracy		tbd
Integrated Return Loss Characteristics		
Dynamic range		80 dB
Total range		0 to -125 dB
Sensitivity		-130 dB
RL resolution ¹		± 0.05 dB
RL accuracy ¹		± 0.10 dB
Integrated Insertion Loss Characteristics		
IL dynamic range ²		18 dB
IL resolution ¹		± 0.05 dB
IL accuracy ¹		± 0.10 dB
Group Delay Measurement		
Accuracy		1.0 ps
Physical		
Class 1 Laser		<10 mW
Operating power		100 W
Weight (controller not included)		25 lb (11.4 kg)
Case size (W x D x H)		14.4 x 13.6 x 6.5 in (366 x 345 x 165 mm)

NOTES

Specifications are for single-mode performance. For multimode operation, specifications are nominal.

1. With integration width of 0.5 m.

2. IL dynamic range is the two-way loss that can be suffered before the scatter level of standard SMF is lower than the noise floor (~ -118 dB/mm).

ORDERING

Catalog #	Description	Includes
OBR 4610	Optical Backscatter Reflectometer, 1040 nm - 1080 nm	OBR 4600 mainframe for 1040-1080 nm, instrument controller (workstation-class laptop) and accessory kit.
OPT06004	Desktop Analysis Software	Software providing all of the analysis and data visualization of the OBR 4600, using only saved OBR measurement data files.
OPT06008	Custom Software Development Kit	SDK toolkit with DLLs allowing custom GUI development.



INTERLAB Sp. z o.o. | Instrumenty badawcze i pomiarowe

Kosiarzy 37 paw. 20, 02-953 Warszawa | +48 22 840 81 80 | interlab@interlab.pl | interlab.pl