



The Luna OBR 4200 offers unprecedented, field-portable diagnostics capabilities to manufacturers and installers of fiber optic modules and short-run networks.


KEY FEATURES AND PRODUCT HIGHLIGHTS

- Verify quality of optical fiber cable assemblies, connectors and short-run networks
- Troubleshoot and distinguish between macro-bends, splices, connectors and breaks
- Locate insertion loss points – save hours of troubleshooting time
- Verify return loss of multiple points in a fiber assembly or harness simultaneously
- Verify and maintain aircraft and shipboard networks
- Customize GUI for automated pass/fail verification of your fiber assembly using software development kit

The Luna **OBR 4200** is the industry's only portable, ultra-high resolution reflectometer with backscatter-level sensitivity designed to test short networks. In a small, rugged, easily transportable platform, the OBR 4200 provides the capability to “see” any event in a fiber assembly or network out to 500 meters with no dead-zone and millimeter resolution. With industry-leading sensitivity and resolution in a portable platform, the OBR 4200 is the ultimate tool for manufacturing and on-site inspection and troubleshooting of your fiber optic network.

MEASUREMENT PERFORMANCE HIGHLIGHTS

- < 3 mm spatial resolution
- 500 m length range with no dead-zone
- -120 dB sensitivity
- 0.1 dB insertion loss resolution

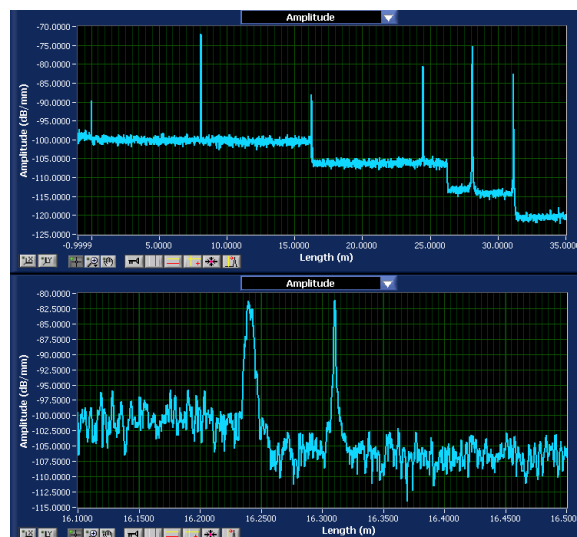

Top: OBR 4200 measurement of an optical fiber harness with a bend loss and splice loss

Bottom: Easily distinguishable bend loss 7 cm before a connection

PARAMETER	SPECIFICATION		UNITS
Maximum Device Length:			
Device length	0 to 500		m
Spatial Resolution:	Low Resolution	High Resolution	
Event resolution ¹	< 50	< 3	mm
Sampling resolution ²	5	0.3	mm
Center Wavelength ³ :			
	1542 ± 2		nm
Integrated Return Loss Characteristics:			
Dynamic range ⁴	50		dB
Total range	-10 to -120		dB
Sensitivity	-120		dB
Resolution ⁵	±0.2		dB
Accuracy ⁵	±0.4		dB
Integrated Insertion Loss Characteristics:			
Dynamic range ⁶	16		dB
Resolution ⁵	±0.1		dB
Accuracy ⁵	±0.2		dB
Measurement Timing	Low Resolution	High Resolution	
2.6 second overhead per scan plus	0.01	0.12	s/m
Optical Output			
Connector type	FC/APC		-
Output power	10		mW
Launch condition	Single-mode output standard. Multimode output available with Mode-Conditioner accessory.		-
Environmental			
Operating temperature	0 to +40		C
Storage temperature	-20 to +60		C
Power ⁷			
Battery life	5		hr
Battery charging time	5		hr
Dimensions and Weight (including Toughbook®)			
Size	8.5(L) x 10.7(W) x 3.85(H)		in
Weight	9.8		lbs

Notes:

Specifications are for single-mode operation. Multimode measurements can be made with Mode-Conditioner accessory.
Panasonic Toughbook-19 specifications found at <http://www.panasonic.com/business/toughbook/toughbook-products.asp#/19>

- 1 FWHM peak width for 14.5 dB reflection in SMF-28e fiber at 50 m. Peak widths increase with distance and modal dispersion.
- 2 Distance between two sample points along the length axis.
- 3 Scans over ~3 nm centered about this wavelength.
- 4 Range between strongest reflection greater than -30 dB and noise floor.
- 5 Measured with 2 m integration width.
- 6 Two way loss that can be tolerated before scatter reaches the noise floor and IL measurements are no longer possible.
- 7 For laptop battery life and charge time, see laptop data sheet.

CLASS 1 LASER PRODUCT