

fTB 2505

Fiber-optic sensing system for distributed strain and temperature monitoring



the nerves of your structure



INTERLAB Sp. z o.o. | Instrumenty badawcze i pomiarowe

Kosiarzy 37 paw. 20, 02-953 Warszawa | +48 22 840 81 80 | interlab@interlab.pl | interlab.pl



Reliable and uninterrupted structural health monitoring

Uninterrupted monitoring is essential to manage risks and maintenance of large structures. Where kilometers of concrete, steel or soil are to be monitored for the early signs of failure, distributed optical fiber sensors are a powerful and highly efficient tool.

With industry-leading accuracy, fibrisTerre's unique digital BOFDA technology answers the demand for reliability

in long-term monitoring of pipelines, power cables, railway lines and geotechnical infrastructure.

The fTB 2505 system uses industry standard optical fibers (the same used in everyday telecommunications) as continuous, long-range strain and temperature sensors. Application-specific coating solutions allow for reliable and versatile implementation into earth and rigid structures.

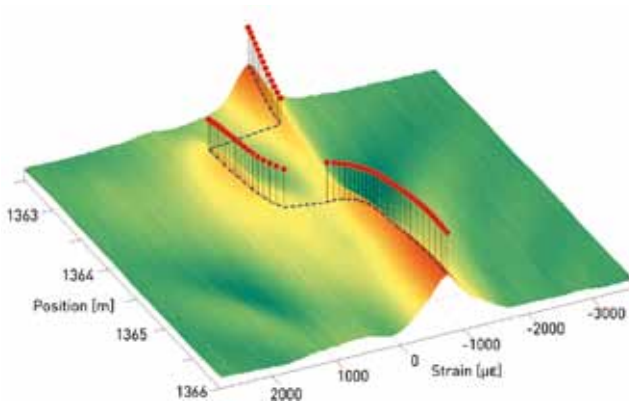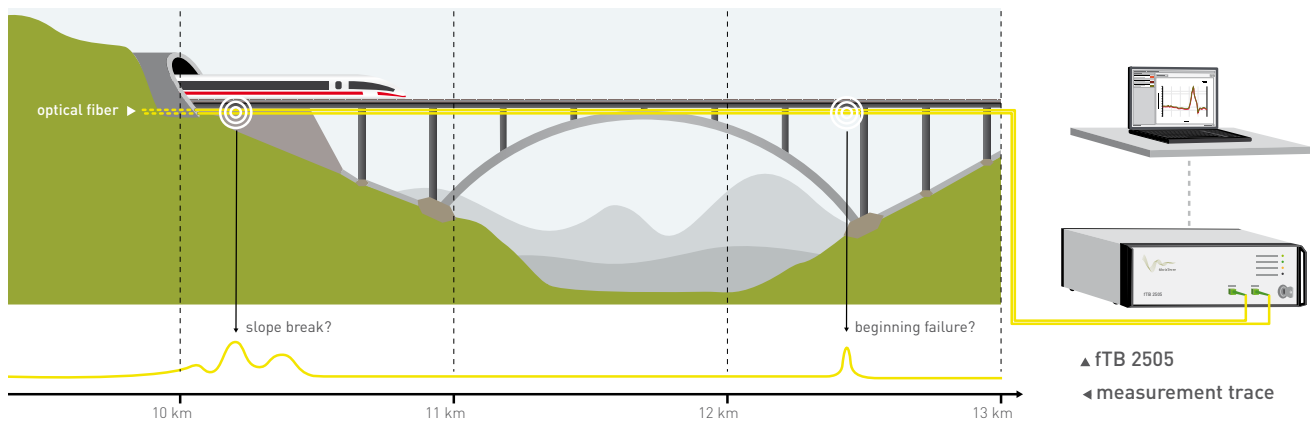

Brillouin distributed sensing

Two light waves, injected into an optical fiber from both ends, meet and make the fiber shiver (literally), creating an acoustic wave inside the fiber. Influenced by this acoustic wave, the light that arrives at the instrument carries information on the fiber's speed of sound – and, consequently, on its strain and temperature.

Typical applications

- Oil and gas pipeline and borehole monitoring
- Early failure detection in geotechnical structures
- Fatigue monitoring of bridges, tunnels, dams
- Strain and temperature monitoring in mining
- Displacement monitoring of river embankments

The complete monitoring solution

fibrisTerre provides



- Quality installation and management through a strong network of partners and integrators
- Tailored service packages for new constructions
- Specific solutions for retro-fitting of existing structures
- A long-term partnership for reliability in service, maintenance and system upgrades



Key features

fibrisTerre's patented Brillouin Optical Frequency Domain Analysis (BOFDA) provides

- Industry leading data accuracy: $< 2 \mu\epsilon$ for strain and $< 0.1^\circ\text{C}$ for temperature
- Spatial resolution down to 20 cm
- Distance range up to 50 km fiber length
- Superior attenuation budget
- Full loop measurement, no return fiber needed
- High-precision measurement of fiber length
- Access to all raw data
- Field friendliness due to light weight and low power consumption

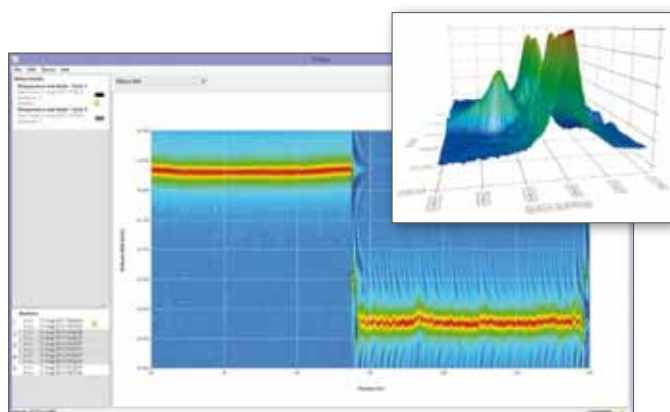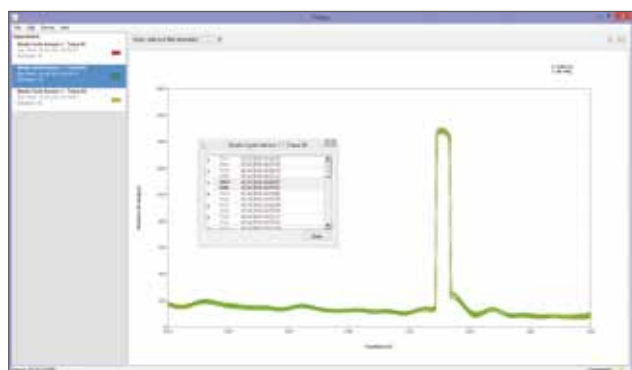

The user interface

The fTB 2505 readout unit is controlled by a remote or local PC or workstation via Ethernet.

fTView, fibrisTerre's powerful monitoring software, enables the user to configure, perform, display and manage measurements.

- Easy measurement setup
- Automatic long-term monitoring in user defined intervals
- A unique, powerful signal processing engine
- Multiple data export, management and visualization options

fTB 2505 series

Performance, features and technical data

Fiber type		Standard single-mode												
Optical connectors		E-2000 / APC												
Sensor configuration		loop												
Distance range (fiber loop)		50 km ¹⁾												
Spatial resolution	up to 2 km fiber up to 25 km fiber up to 50 km fiber ¹⁾	0.2 m ²⁾ 0.5 m 1.0 m												
Spatial accuracy		0.05 m												
Optical budget ³⁾		> 20 dB												
Measurable parameters		Brillouin frequency shift, temperature, strain												
Accuracy and range		<table> <tr> <th></th><th>Accuracy</th><th>Range</th></tr> <tr> <td>strain</td><td>< 2 $\mu\epsilon$</td><td>-3% to +3% ⁴⁾</td></tr> <tr> <td>temperature</td><td>< 0.1°C</td><td>-273 to +1000°C ⁴⁾</td></tr> <tr> <td>Brillouin freq. shift</td><td>< 100 kHz</td><td>10 – 13 GHz</td></tr> </table>		Accuracy	Range	strain	< 2 $\mu\epsilon$	-3% to +3% ⁴⁾	temperature	< 0.1°C	-273 to +1000°C ⁴⁾	Brillouin freq. shift	< 100 kHz	10 – 13 GHz
	Accuracy	Range												
strain	< 2 $\mu\epsilon$	-3% to +3% ⁴⁾												
temperature	< 0.1°C	-273 to +1000°C ⁴⁾												
Brillouin freq. shift	< 100 kHz	10 – 13 GHz												
Typical acquisition time ⁵⁾	0.2 km fiber 2 km fiber 10 km fiber 25 km fiber	20 seconds 1 minute 8 minutes 25 minutes												
Communication interface		Ethernet												
Data export formats		binary, ASCII												
Measurement modes		Single measurements on demand; continuous monitoring Automatic detection of fiber length and attenuation												
Remote operation		Remote measurements, system diagnostics												
Operating temperature		5 - 40°C												
Dimensions	L x W x H	495 x 482 x 145 mm (19" rack case)												
Weight		13 kg												
Power consumption		60 W												
Laser class		1M												

¹⁾ Standard distance range is 25 km. Distance range enhancement to 50 km available upon request

²⁾ Software resolution enhancement selectable in user interface

³⁾ High optical losses along the sensing fiber may degrade the strain / temperature accuracy

⁴⁾ Limited by optical fiber

⁵⁾ Estimated for typical measurements. Measurement time will vary with resolution, accuracy and strain / temperature range



The company

fibrisTerre is a Berlin based designer and manufacturer of distributed fiber optic sensing solutions for simultaneous strain and temperature measurements. Empowered by the pioneering Brillouin Optical Frequency Domain Analysis (BOFDA), fibrisTerre's systems leave no critical spots of a structure unattended.

With a strong focus on research and development, fibrisTerre offers cutting edge solutions for structural health monitoring projects in the energy sector, in civil construction and geotechnical engineering.

a spin-off of:



fibrisTerre Systems GmbH
Torellstr. 7
10243 Berlin - Germany
tel +49 30 6290 1320
info@fibristerre.de



INTERLAB Sp. z o.o. | Instrumenty badawcze i pomiarowe

Kosiarzy 37 paw. 20, 02-953 Warszawa | +48 22 840 81 80 | interlab@interlab.pl | interlab.pl